

REVISIONS																						
SYMBOL	DESCRIPTION											DATE	APPROVAL									
-	RELEASED											7/21/92	<i>[Signature]</i>									
SHEET REVISION STATUS																						
SH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
REV	--	--	--																			
SH	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40		
REV																						
ORIGINATOR <i>T. Perry</i> T. Perry/Paramax											DATE 7/14/92		FSC: 5945									
APPROVED <i>N/A</i> S. Archer-Davies/Paramax											—		Relays, Electromagnetic, Hermetically Sealed, 3PDT (3C), Latching, 25 Amperes, All Welded									
CODE 311 APPROVAL P. Jones/GSEC <i>[Signature]</i>											7-20-92											
CODE 311 SUPERVISOR, APVL G. P. Kramer, Jr. <i>[Signature]</i>											7/20/92											
ADDITIONAL APPROVAL													S-311-P-754/11									
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION GODDARD SPACE FLIGHT CENTER GREENBELT, MARYLAND 20771 CAGE CODE: 25306 PAGE 1 OF 3																						

GSFC DETAIL SPECIFICATION

RELAYS, ELECTROMAGNETIC, HERMETICALLY SEALED, 3PDT (3C),
LATCHING, 25 AMPERES, ALL WELDED

The requirements for procuring the relays described herein shall consist of this specification and the current revision of GSFC S-311-P-754 except failure rate level "M" is not applicable.

Table I. Part Numbers and characteristics

GSFC Part Number	Similar to MIL Part Number	Terminal Type	Coil Voltage (Nominal)	Pickup Voltage (max.)	Dropout Voltage (min.)	DC Coil Resistance (ohms)
G311P754/11-001	MS27742-1	Solder Hook	28.0 Vdc	18.0 Vdc	N/A	450 ± 10%
G311P754/11-002	MS27742-2	Plug-in	28.0 Vdc	18.0 Vdc	N/A	450 ± 10%

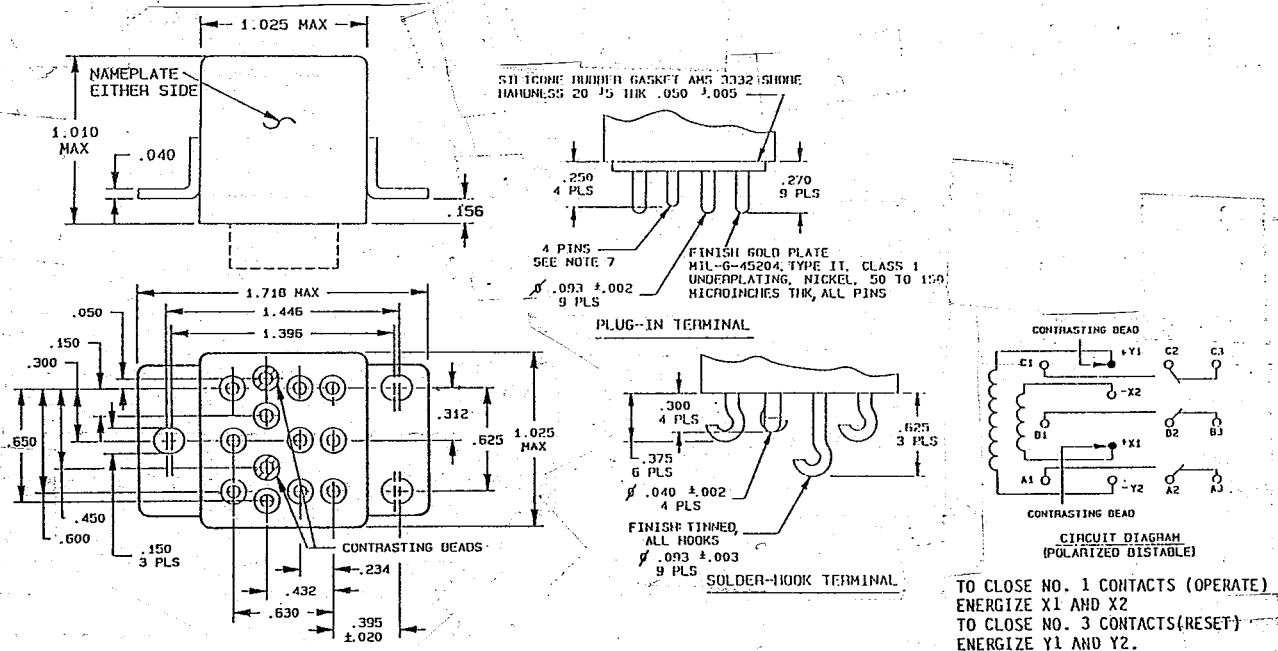


Figure 1. Configuration and circuit diagram.

Notes:

- Relays must be provided with unpainted enclosures.
- Terminal numbers do not appear on the header. There shall be affixed to each relay a suitable circuit diagram that identifies each terminal location.

REQUIREMENTS:

Operating Temperature Range: -70°C to +125°C

Other: All requirements (contact ratings, life test requirements, environmental data, etc.) shall be as specified in MS27742 except as detailed or modified herein.

Seal

Fine leak test 1 X 10⁻⁸ cc/sec max.
Gross leak test not applicable

Electrical measurements

Insulation resistance see MS27742
Dielectric strength see MS27742
Coil resistance see Table I
Pickup voltage (latch & reset) see Table I
Dropout voltage not applicable
Contact voltage drop 0.150 volt max.
Operate time (latch & reset) 15 ms max.
Release time not applicable
Bounce time see MS27742
Coil transient suppression not applicable
Neutral screen applicable

Vibration

Sinusoidal 30 g (10 - 3000 Hz)
Random not applicable

High temperature soak applicable
High temperature run-in not applicable
Low temperature run-in applicable
Room temperature run-in applicable

Seal

Fine leak test 1 x 10⁻⁸ cc/sec max.
Gross leak test applicable